


- 1 Locate the factory wiring harness in the dash.

Re-connect the negative battery terminal and test the unit for proper operation.

- 2 Attach the Double DIN brackets to the aftermarket radio then mount the unit in the sub dash. (Figure A)

- 3 Reassemble dash in reverse order of disassembly using the trim panel instead of the factory trim panel.

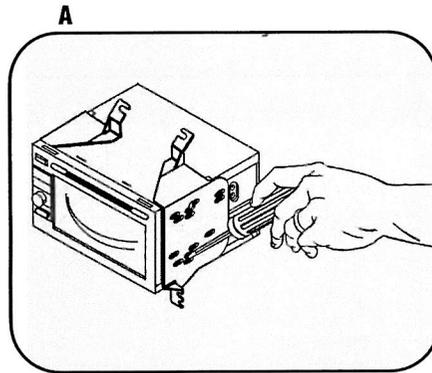

## Installation Manual Double DIN Kit

Part-No.: 381143-23-1-1

### HYUNDAI GENESIS COUPE 2010 (WITH AUTO CLIMATE CONTROLS)


#### KIT FEATURES

- DDIN Head Unit Provision
- ISO Stacked Head Unit Provision
- Painted Silver to match factory finish




#### KIT COMPONENTS

A) Trim Panel B) Double DIN Brackets C) (6) PC-7503 Panel Clips

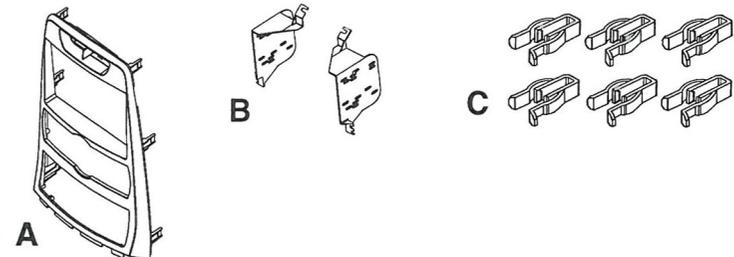

#### TOOLS REQUIRED:

- Small Flat Blade Screwdriver
- Phillips Screwdriver
- Panel Removal Tool
- Socket Wrench



## Installation Manual Double DIN Kit Hyundai Genesis

**1** Disconnect the negative battery terminal to prevent an accidental short circuit.




**2** Unclip and remove the shifter trim panel. (Figure A)

**3** Unclip and remove the radio/climate control trim panel. (Figure B)

**4** Unclip and remove the display trim panel above radio. (Figure C)

**5** Remove (4) Phillips screws securing the radio.

**6** Remove (4) Phillips screws securing the climate control to the factory trim panel.

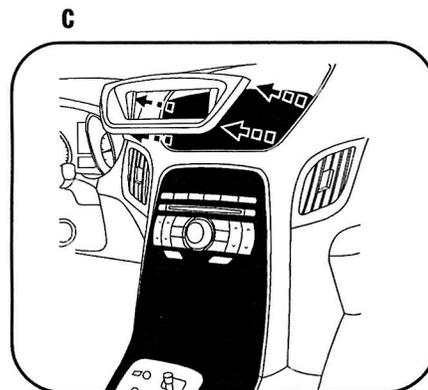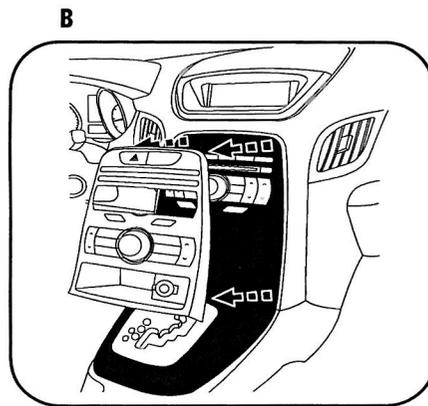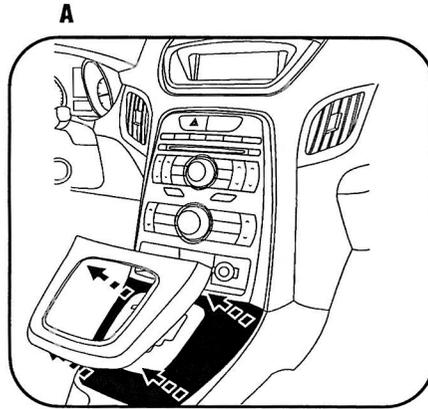

**1** Attach the climate control to the trim plate using the factory hardware. (Figure A)

**2** Attach the (6) panel clips to the trim plate. (Figure B)

